

AP240



Installation method

- For wall mounting, corner installation

Properties

- Start-Stop flushing
- Flushing volume 6(6-9) L
- Water connection possible on left and right side
- Insulated against condensation
- Color: white

Special features


- Flushing operation on the right side
- Quiet hydraulic fill valve

Product contains

- Stop valve
- Chromed Cu water connection pipe
- Flush pipe connector
- Flush pipe 270 x 220 mm Ø 50 / 44 mm
- Installation material

Article number: **4060428401**
EAN Code: 8711778213739
Packing: 30 Pcs./Pallet

Technical drawing

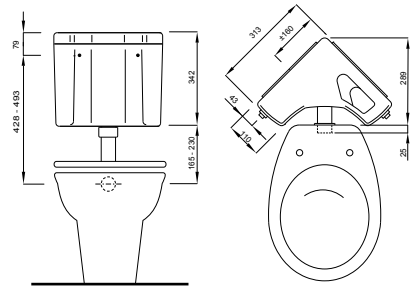

CE EN 14055 - CL 1 - 6 - NL I - VR II

AP122 MONOBLOCK



Installation method

- For mounting on the WC ceramic

Properties

- Dual flushing
- Flushing volume (3/6 L)
- Water connection possible on left, right or at the rear center
- For water connection at the rear, please order the connecting hose separately (Article number 365138)
- Fully insulated against condensation
- Color: white

Special features


- Flushing operation on the right side
- Quiet hydraulic fill valve

Product contains


- Stop valve
- Chromed Cu water connection pipe
- Installation material

Article number: **604683**
EAN-Code: 3838912028020
Packing: 32 Pcs./Pallet

Technical drawing

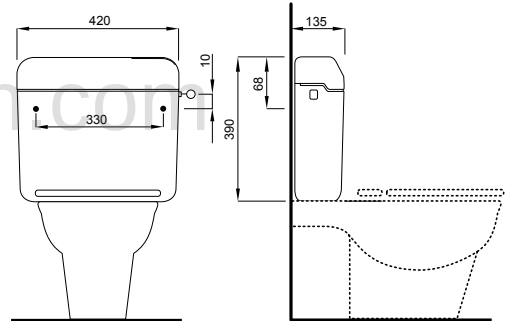

AP122 MONOBLOCK

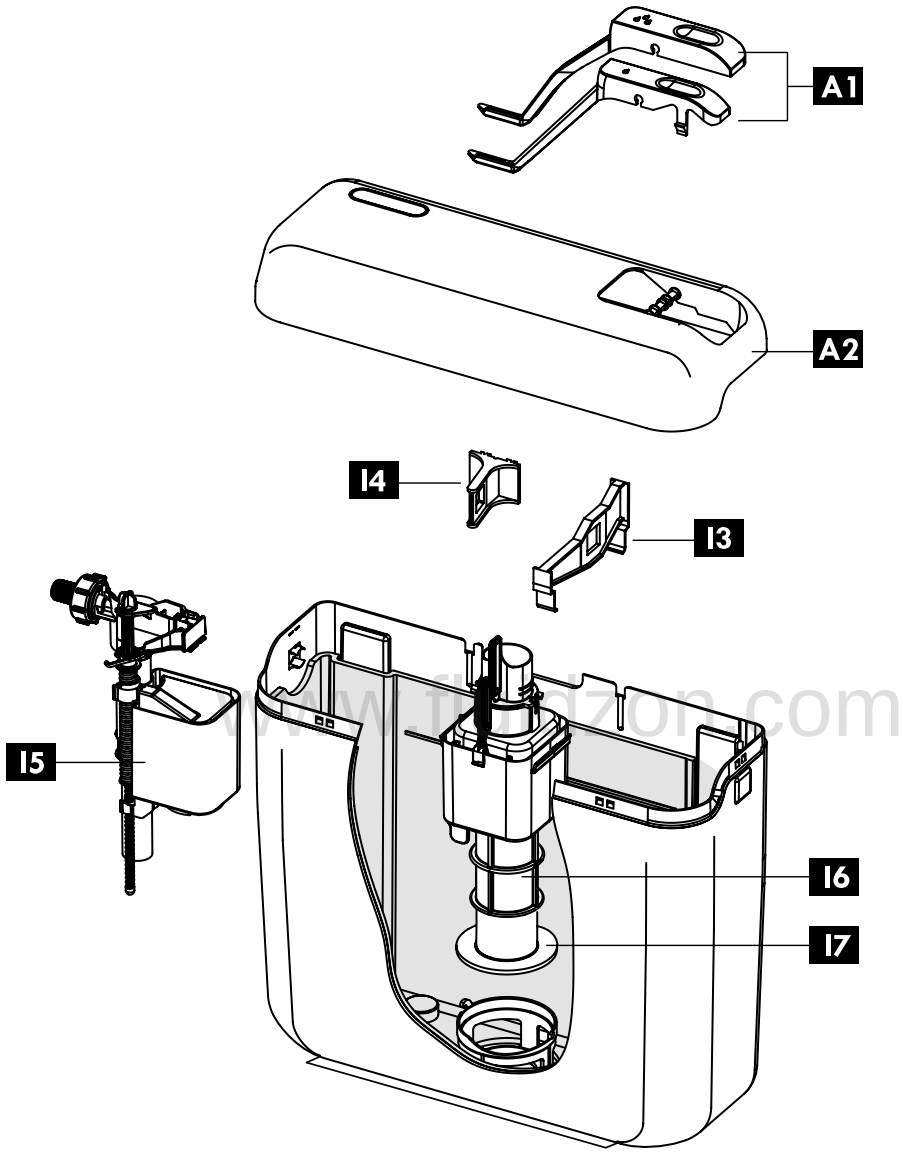

Pos.	Art. nr.	EAN-Code	Description	Color	Details
A 1	243276	3838912032829	Function buttons	White	
A 2	243278	3838912032904	Flushing cistern cover	White	Without function buttons
I 3	243282	3838912033017	Fill valve retainer 1		
I 4	243285	3838912033024	Fill valve retainer 2		
I 5	628458	3838912038012	Fill valve		
I 6	243280	3838912033109	Flush valve		Complete with seal
I 7	243275	3838912033918	Valve seal		