

FILL VALVES OVERVIEW

HVK G 3/8 brass	400 G 3/8 brass	400 G 1/2 brass	400 G 3/8 plastic
			
8035432795	400E-025-P25	400U-026-P25	400E-027-P25
8711778074460	3838912063458	3838912063472	3838912063465
G 3/8 brass	G 3/8 brass	G 1/2 brass	G 3/8 plastic
side	bottom	bottom	bottom
hydraulic	hydraulic	hydraulic	hydraulic
Class 1	Class 1	Class 1	Class 1
✓	✓	✓	✓
0,5 – 10 bar	0,2 – 16 bar	0,2 – 16 bar	0,2 – 16 bar

TOILET VALVE KITS

KIT 747 + 550	KIT 747 + 820	KIT KIT 400E & 820
		
K-747E-035-P10	K-747E-034-P10	K-400E-029-P10
3838912063557	3838912063540	8681282655717
KIT 400E & 821	KIT 400E + 550	
		
K-400E-030-P10	K-400E-024-P10	
8681282655724	3838912063533	

FILL VALVE 400, brass shank G 3/8, bottom inlet



Purpose

- Suitable for exposed plastic and ceramic flushing cistern
- with bottom water connection


Properties

- Bottom mount valve
- Height adjustable valve (230 – 355 mm)
- Suitable for high and low pressure
- Extremely quiet operation (Classe 1)
- Fast filling time
- Unique self-cleaning valve mechanism
- Fast and easy to install
- Installation sheet included
- Proven and reliable quality
- Consistent performance

Technical characteristic

- Brass shank G 3/8 x 43 mm

Technical drawing

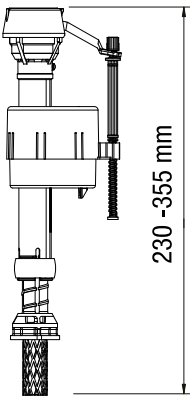

Article number: 400E-025-P25
EAN-Code: 3838912063458
Packing: 25 Pcs./carton

www.fluidzon.com



FILL VALVE 400, plastic shank G 3/8, bottom inlet



Purpose

- Suitable for exposed plastic and ceramic flushing cistern
- with bottom water connection


Properties

- Bottom mount valve
- Height adjustable valve (230 – 355 mm)
- Suitable for high and low pressure
- Extremely quiet operation (Classe 1)
- Fast filling time
- Unique self-cleaning valve mechanism
- Fast and easy to install
- Installation sheet included
- Proven and reliable quality
- Consistent performance

Technical characteristic

- Plastic shank G 3/8 x 43 mm

Technical drawing

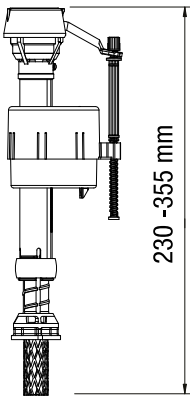

Article number: 400E-027-P25
EAN-Code: 3838912063465
Packing: 25 Pcs./carton



FILL VALVE 400, brass shank G 1/2, bottom inlet



Purpose

- Suitable for exposed plastic and ceramic flushing cistern
- with bottom water connection


Properties

- Bottom mount valve
- Height adjustable valve (230 – 355 mm)
- Suitable for high and low pressure
- Extremely quiet operation (Classe 1)
- Fast filling time
- Unique self-cleaning valve mechanism
- Fast and easy to install
- Installation sheet included
- Proven and reliable quality
- Consistent performance

Technical characteristic

- Brass shank G 1/2 x 50 mm

Technical drawing

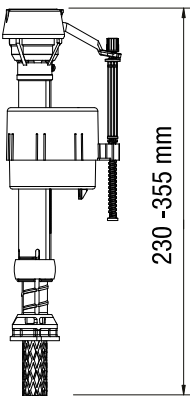

Article number: 400U-026-P25
EAN-Code: 3838912063472
Packing: 25 Pcs./carton

