

FILL VALVES OVERVIEW

HVK G 3/8 brass	400 G 3/8 brass	400 G 1/2 brass	400 G 3/8 plastic
			
8035432795	400E-025-P25	400U-026-P25	400E-027-P25
8711778074460	3838912063458	3838912063472	3838912063465
G 3/8 brass	G 3/8 brass	G 1/2 brass	G 3/8 plastic
side	bottom	bottom	bottom
hydraulic	hydraulic	hydraulic	hydraulic
Class 1	Class 1	Class 1	Class 1
✓	✓	✓	✓
0,5 – 10 bar	0,2 – 16 bar	0,2 – 16 bar	0,2 – 16 bar

TOILET VALVE KITS

KIT 747 + 550	KIT 747 + 820	KIT KIT 400E & 820
		
K-747E-035-P10	K-747E-034-P10	K-400E-029-P10
3838912063557	3838912063540	8681282655717
KIT 400E & 821	KIT 400E + 550	
		
K-400E-030-P10	K-400E-024-P10	
8681282655724	3838912063533	

FILL VALVE HDV, brass shank G 3/8, side inlet



Purpose

- Suitable for concealed and exposed flushing cisterns


Properties

- Durable mechanical filling valve
- Extremely robust filling valve
- Side mount valve
- Resistant to small-sized particles in inflow water
- Extremely quiet operation (Classe 1)
- Short filling time
- Water level adjusting screw
- Fast and easy to install
- Installation sheet included
- Proven and reliable quality
- Consistent performance

Technical characteristic

- Brass shank G 3/8 x 21 mm

Technical drawing

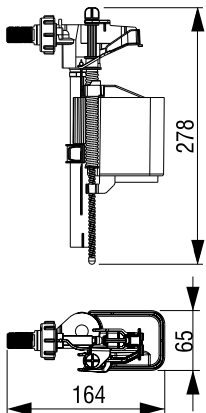

Article number: 229109
EAN-Code: 3838912011916
Packing: 40 Pcs./carton

www.fluidzon.com



FILL VALVE HVK, brass shank G 3/8, side inlet



Purpose

- Suitable for concealed and exposed flushing cisterns


Properties

- Durable hydraulic filling valve
- Side mount valve
- Extremely quiet operation (Classe 1)
- Fast filling time
- Water level adjusting screw
- Telescopic tube
- Fast and easy to install
- Installation sheet included
- Proven and reliable quality
- Consistent performance

Technical characteristic

- Brass shank G 3/8 x 33 mm

Technical drawing

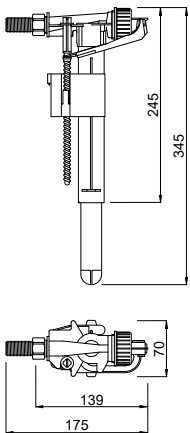

Article number: 8035432795
EAN-Code: 8711778074460
Packing: 36 Pcs./carton



FLUSH VALVE 550, outlet G 2



Purpose

- Suitable for ceramic cisterns


Properties

- Dual flush valve with mechanical activation
- Adjustable overflow height (215,9 – 342,9 mm)
- Cable length 550 mm for maximum flexibility
- Full and partial flush option available
- Easily activated with dual flush button
- Possibility of installing the activation button in different positions of the cistern (top, front, side)
- For cistern button hole 18 - 40 mm
- Adjustable for many ceramic cisterns
- Long lasting silicone seal
- Robust design
- Fast and easy to install
- Installation sheet included
- Proven and reliable quality
- Consistent performance

Technical characteristic

- Outlet G 2

Technical drawing

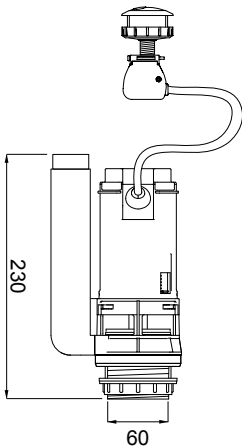

Article number: 550B-005-P15
EAN-Code: 3838912063489
Packing: 15 Pcs./carton

